


Overlapping Toothed Lock Washers

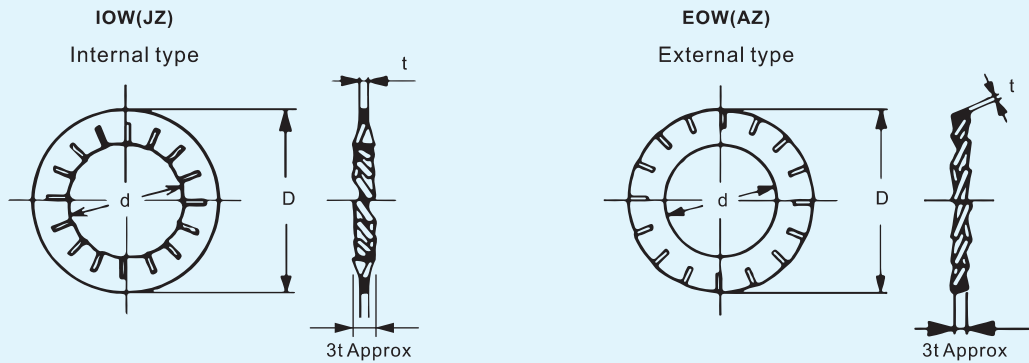


Unit:mm

Size-No		Screw Size		d		D		t		Nos. of Teeth	
IOW Internal	Eow External	m/m	Inch	Basic	Tol.	Basic	Tol.	Basic	Tol.	Internal	External
JZ-3	AZ-3	3	—	3.05	+0.30 0	6.0	±0.24	0.4	±0.03	8	10
4	4	4	5/32	4.10		8.0	±0.29	0.5		8	12
5	5	5	—	5.10		9.2		0.6		8	12
6	6	6	—	6.10	+0.36	11.0		0.7		10	12
8	8	8	5/16	8.20	0	14.0	±0.35	0.8		12	14
10	10	10	—	10.2	+0.43 0	18.0		0.9	±0.04	12	16
12	12	12	—	12.3		20.0		1.0		14	18
14	14	14	—	14.3		24.0	±0.42	1.1		16	20
16	16	16	5/8	16.3	+0.52 0	26.0		1.2		16	20
18	18	18	—	18.5		30.0		1.4		16	20
20	20	20	—	20.5		32.5		1.4	±0.05	16	22
22	22	22	7/8	22.5	0	35.0	±0.50	1.5		18	22
24	24	24	—	24.5		38.0		1.5		20	24

Material = Carbon spring steel / Stainless spring steel (SUS#304+HV160)
 Hardness = HRC40~50
 Finish = Zinc / Yellow Zinc

材質 = 碳鋼 / 不銹鋼 SUS#304+HV160
 硬度 = HRC40~50
 表面處理 = 鍍鋅/五彩

Countersunk type

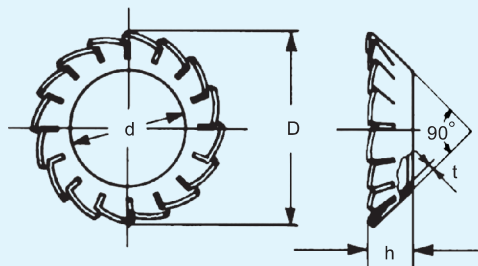

Unit:mm

Size-No	Screw Size		d		D		h	t		Nos. of Teeth
	m/m	Inch	Basic	Tol.	Basic	Tol.		Basic	Tol.	
AZV-3	3	—	3.1		6	±0.24	1.7	0.20	±0.02	12
4	4	5/32	4.2	±0.30	8	±0.29	2.2	0.25		14
5	5	—	5.2		10		2.5	0.30		14
6	6	—	6.3	±0.36	12	±0.35	3.2	0.30		16

Material = Carbon spring steel / Stainless spring steel (SUS#304+HV160)
 Hardness = HRC40~50
 Finish = Zinc / Yellow Zinc

材質 = 碳鋼 / 不銹鋼 SUS#304+HV160
 硬度 = HRC40~50
 表面處理 = 鍍鋅/五彩